

Is Now Part of
to make changes without further notice to any products or
arising out of the application or use of any product or of
Semiconductor products, including compliance with



To learn more about ON Semiconductor, please visit our website at
www.onsemi.com





Schematic Diagram

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Power Supply Voltage	VCC	18 or 36	V
Differential Input Voltage	VI(DIFF)	36	V
Input Voltage	VI	-0.3 to +36	V
Output Short Circuit to GND	-	Continuous	-
Power Dissipation, Ta = 25 C			
8-DIP	PD	1040	mW
8-SOIC		480	
Operating Temperature			
LM393/LM393A		0 ~ +70	
LM2903	TOPR	-40 ~ +105	C
LM293A		-25 ~ +85	
Storage Temperature	TSTG	-65 ~ +150	C

Thermal Data

Electrical Characteristics

($V_{CC} = 5V$, $T_A = 25\text{ C}$, unless otherwise specified)

Parameter	Symbol	Conditions	LM293A/LM393A			LM393			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Input Offset Voltage	V_{IO}	$V_{O(P)} = 1.4V$, $R_S = 0$	-	1	2	-	1	5	mV
		$V_{CM} = 0$ to $1.5V$ Note1	-	-	4.0	-	-	9.0	
Input Offset Current	I_{IO}		-	5	50	-	5	50	nA
		Note1	-	-	150	-	-	150	
Input Bias Current	I_{BIAS}		-	65	250	-	65	250	nA
		Note1	-	-	400	-	-	400	
Input Common Mode Voltage Range	$V_{I(R)}$		0	-	$V_{CC} - 1.5$	0	-	$V_{CC} - 1.5$	V
		Note1	0	-	$V_{CC} - 2$	0	-	$V_{CC} - 2$	
Supply Current	I_{CC}	$R_L = \text{---}$, $V_{CC} = 5V$	-	0.6	1	-	0.6	1	mA
		$R_L = \text{---}$, $V_{CC} = 30V$	-	0.8	2.5	-	0.8	2.5	
Voltage Gain	G_V	$V_{CC} = 15V$, $R_L = 15k$ (for large $V_{O(P-P)}$ swing)	50	200	-	50	200	-	V/mV
Large Signal Response Time	T_{LRES}	$V_I = \text{TTL Logic Swing}$ $V_{REF} = 1.4V$, $V_{RL} = 5V$, $R_L = 5.1k$	-	350	-	-	350	-	nS
Response Time	T_{RES}	$V_{RL} = 5V$, $R_L = 5.1k$	-	1.4	-	-	1.4	-	S
Output Sink Current	I_{SINK}	$V_{I(-)} = 1V$, $V_{I(+)} = 0V$, $V_{O(P)} = 1.5V$	6	18	-	6	18	-	mA
Output Saturation Voltage	V_{SAT}	$V_{I(-)} = 1V$, $V_{I(+)} = 0V$	-	160	400	-	160	400	mV
		$I_{SINK} = 4mA$ Note1	-	-	700	-	-	700	
Output Leakage Current	$I_{O(LKG)}$	$V_{I(-)} = 0V$, $V_{I(+)} = 1V$		0.1	-	-	0.1	-	nA
		$V_{O(P)} = 5V$ $V_{O(P)} = 30V$	-	-	1.0	-	-	1.0	A

Note1

LM393/LM393A: 0 T_A +70 C

LM2903: -40 T_A +105 C

LM293A: -25 T_A +85 C

Electrical Characteristics (Continued)(V_{CC} = 5V, T_A = 25 °C, unless otherwise specified)

Parameter	Symbol	Conditions	LM2903			Unit
			Min.	Typ.	Max.	
Input Offset Voltage	V _{IO}	V _{O(P)} = 1.4V, R _S = 0	-	1	7	mV
		V _{CM} = 0 to 1.5V Note1	-	9	15	
Input Offset Current	I _{IO}		-	5	50	nA
		Note1	-	50	200	
Input Bias Current	I _{BIAS}		-	65	250	nA
		Note1	-	-	500	
Input Common Mode Voltage Range	V _{I(R)}		0	-	V _{CC} - 1.5	V
		Note1	0	-	V _{CC} - 2	
Supply Current	I _{CC}	R _L = ∞, V _{CC} = 5V	-	0.6	1	mA
		R _L = ∞, V _{CC} = 30V	-	1	2.5	
Voltage Gain	GV	V _{CC} = 15V, R _L = 15k (for large V _{O(P-P)} swing)	25	100	-	V/mV
Large Signal Response Time	T _{LR}	V _I = TTL Logic Swing V _{REF} = 1.4V, V _R = 5V, R _L = 5.1k	-	350	-	nS
Response Time	T _R	V _R = 5V, R _L = 5.1k	-	1.5	-	S
Output Sink Current	I _{SINK}	V _{I(-)} = 1V, V _{I(+)} = 0V, V _{O(P)} = 1.5V	6	16	-	mA
Output Saturation Voltage	V _{SAT}	V _{I(-)} = 1V, V _{I(+)} = 0V	-	160	400	mV
		I _{SINK} = 4mA Note1	-	-	700	
Output Leakage Current	I _{O(LKG)}	V _{I(-)} = 0V, V _{O(P)} = 5V	-	0.1	-	nA
		V _{I(+)} = 1V, V _{O(P)} = 30V	-	-	1.0	A

Note1

LM393/LM393A: 0 °C to +70 °C

LM2903: -40 °C to +105 °C

LM293A: -25 °C to +85 °C

Typical Performance Characteristics

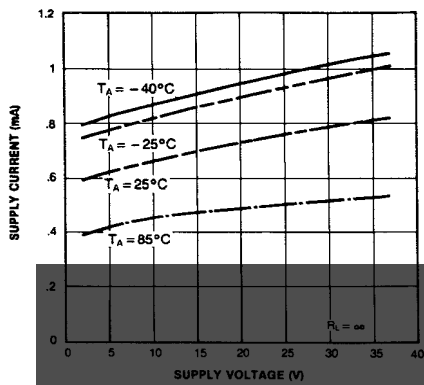


Figure 1. Supply Current vs Supply Voltage

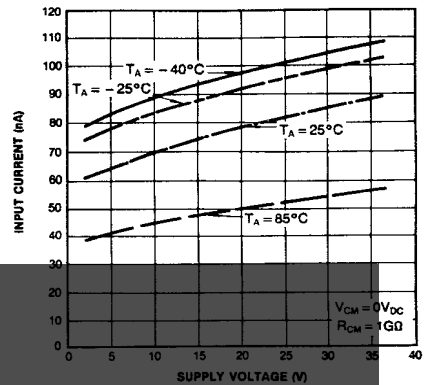


Figure 2. Input Current vs Supply Voltage

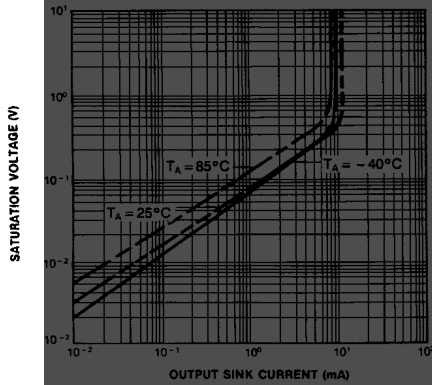


Figure 3. Output Saturation Voltage vs Sink Current

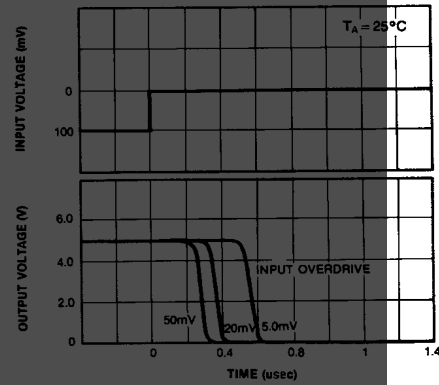


Figure 4. Response Time for Various Input Overdrive-Negative Transition

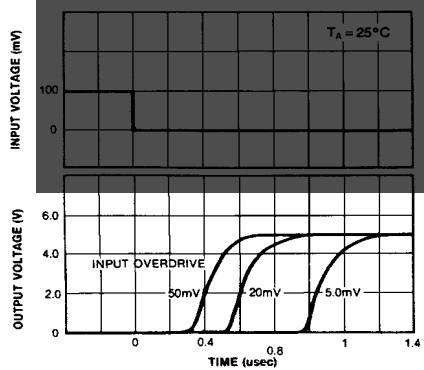


Figure 5. Response Time for Various Input Overdrive-Positive Transition

Mechanical Dimensions

Package

Dimensions in millimeters



Mechanical Dimensions (Continued)

Package

Dimensions in millimeters
