

NTH4L018N075SC1

NTH4L018N075SC1

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
SOURCE-DRAIN DIODE CHARACTERISTICS						
		-	-		-	
		μ	-		-	
			-		-	μ
			-		-	
			-		-	
			-		-	

NTH4L018N075SC1

TYPICAL CHARACTERISTICS

TYPICAL CHARACTERISTICS

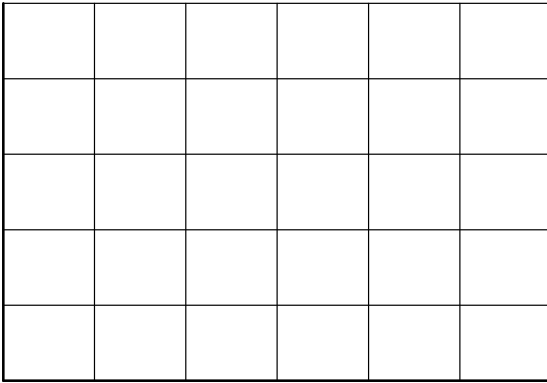


Figure 7. Gate-to-Source Voltage vs. Total Charge

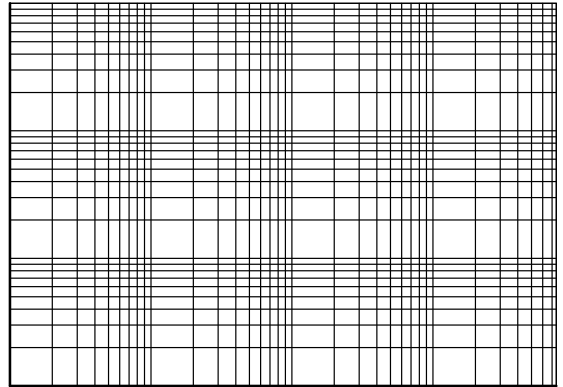


Figure 8. Capacitance vs. Drain-to-Source Voltage

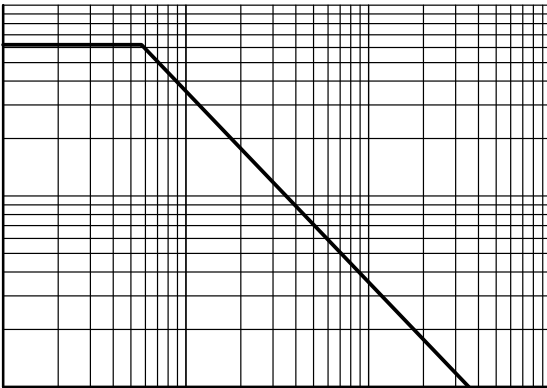


Figure 9. Unclamped Inductive Switching Capability



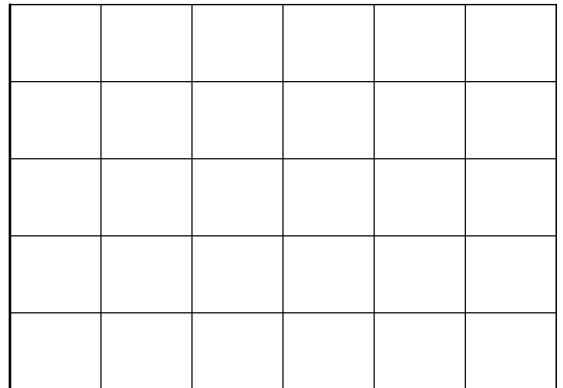


Figure 10. Maximum Continuous Drain Current vs. Case Temperature

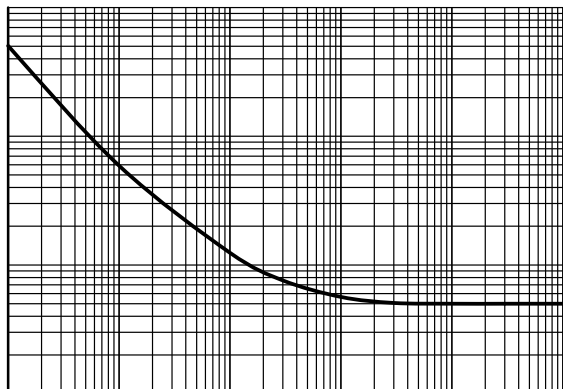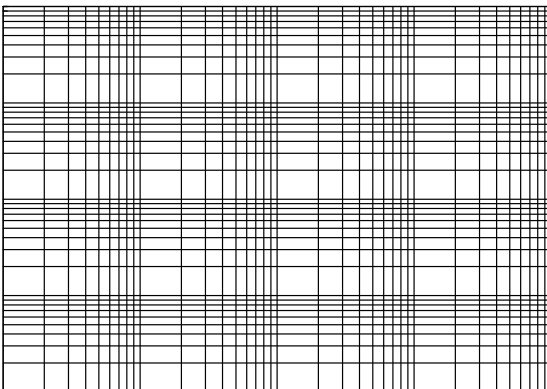

NTH4L018N075SC1

TYPICAL CHARACTERISTICS


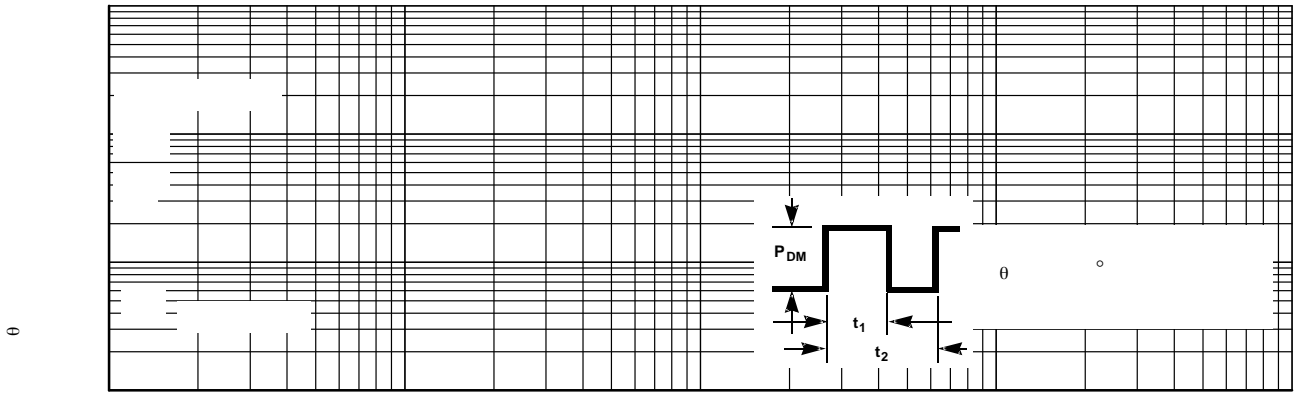


Figure 13. Junction-to-Case Thermal Response

NTH4L018N075SC1

PACKAGE DIMENSIONS

TO-

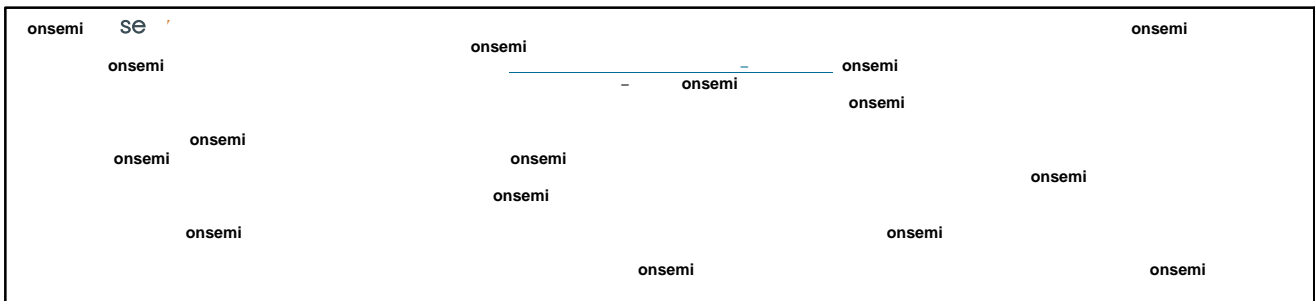

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS

Technical Library: _____
onsemi Website: _____

ONLINE SUPPORT

For additional information, please contact your local Sales Representative at _____