


SIP32 6.35x3.68
CASE 127DW
ISSUE O


DATE 12 APR 2016

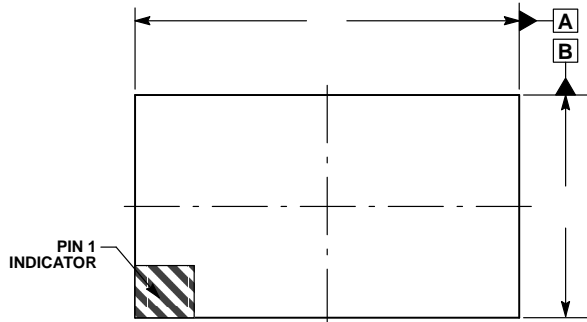

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BUMPS.
 4. DIMENSIONS b, b1, L AND L2 ARE MEASURED AT THE MAXIMUM BUMP DIMENSION PARALLEL TO DATUM C. THE POSITIONAL TOLERANCE APPLIES TO ALL OF THE SOLDER BUMPS.


DIM	MILLIMETERS	
	MIN	MAX
A	---	1.960
A1	0.076	0.180

b	
---	--

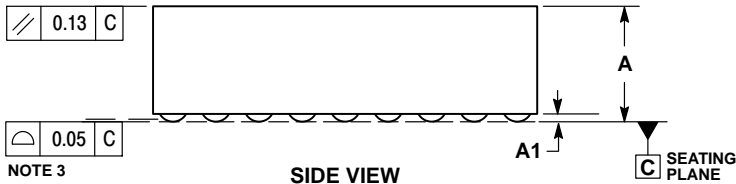

e	0.914 BSC
e1	0.696 BSC

C

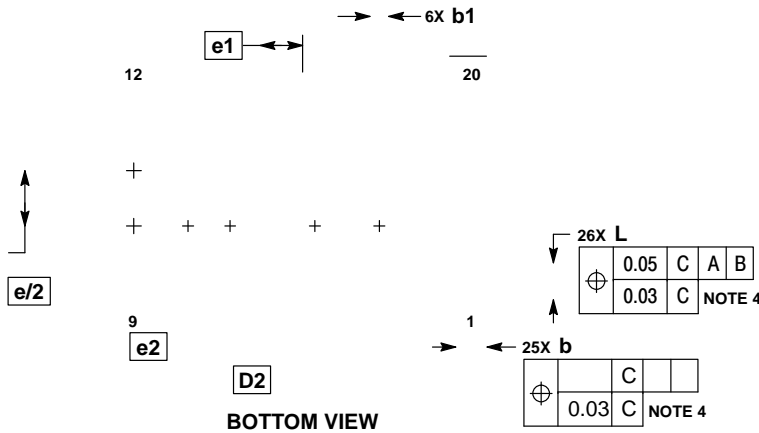

**RECOMMENDED
SOLDERING FOOTPRINT***

*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.