



NMP (Taping) CASE 135AD **ISSUE B**

DATE 14 JUL 2015

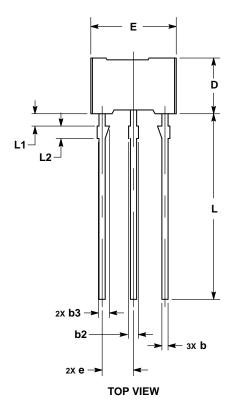



NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- ASME Y14.5M, 1994.

 2. CONTROLLING DIMENSION: MILLIMETERS.

 3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE.

 4. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC RODY.
- PLASTIC BODY.

	MILLIMETERS		
DIM	MIN	MAX	
Α	2.30	2.70	
A2	0.85	1.25	
b	0.40	0.60	
b2	0.50	0.70	
b3	0.75	1.05	
С	0.35	0.55	
D	4.30	4.70	
E	6.70	7.10	
е	2.44	2.64	
Н	0.80	1.20	
L	14.50	15.50	
L1	0.80	1.20	
L2	0.80	1.20	

	П		
END VIEW			

DOCUMENT NUMBER:	98AON78697E	
DESCRIPTION:		

onsemi and are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.