




**IBGA79 7.50x6.50x1.05, 0.65P**  
**CASE 503CS**  
**ISSUE B**

DATE 07 FEB 2024



- 4. DIAMETER PARALLEL TO DATUM C.
- 5. COPLANARITY APPLIES TO THE SPHERICAL CROWN OF THE SOLDER BALLS.
- 6. DATUM C, THE SEATING PLANE IS DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.
- 7. GLASS: 0.400 THICKNESS; REFRACTIVE INDEX = 1.52; AR COATING R<1% 420-850nm (EACH SIDE).
- 8. AIR GAP BETWEEN GLASS AND PIXEL ARRAY: 0.150 THICKNESS.
- 9. PARALLELISM APPLIES ONLY TO THE ACTIVE ARRAY.
- 10. MAXIMUM ROTATION OF ACTIVE ARRAY RELATIVE TO DATUMS A AND B IS ± 0.5°.
- 11. REFER TO THE DEVICE DATA SHEET FOR TOTAL PIXEL ARRAY DEFINITIONS.

---
0.320
1.0
0
0.500
0.350
7.425
6.200
3.790
6.425
4.660
3.175

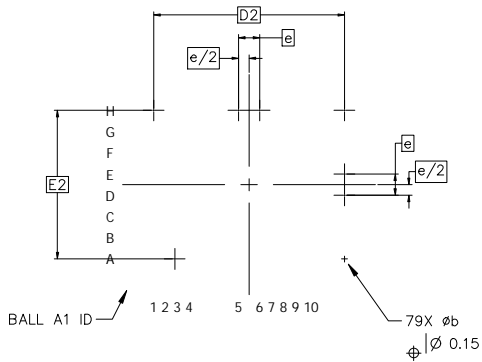

**GENERIC MARKING DIAGRAM\***

XXXX = Specific Device Code  
 Y = Year  
 ZZZ = Lot Traceability

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.