DETAIL A


10

BOTTOM VIEW

UDFN10 3.5x2, 0.575P

CASE 506CU ISSUE O

DATE 05 NOV 2013

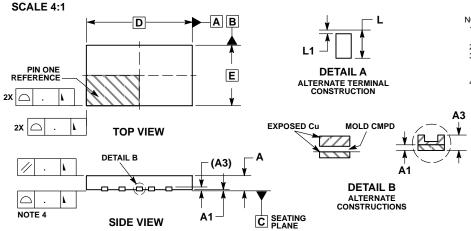

10X L

13X b

Φ

NOTE 3

е

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.
- DIMENSIONS b APPLIES TO PLATED
 TERMINAL AND IS MEASURED BETWEEN
- 0.15 AND 0.25 MM FROM TERMINAL TIP.
 COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

	MILLIMETERS		
DIM	MIN	MAX	
Α			
A1			
A3		. L	
b		<u>'</u>	
D		14	
E		11	
е		14	
		. —	
L			
L1			

GENERIC MARKING DIAGRAM*




XXX = Specific Device Code

= Date Code

= Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

RECOMMENDED **MOUNTING FOOTPRINT**

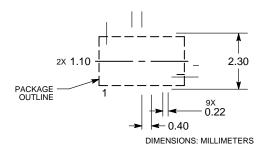

DOCUMENT NUMBER:	98AON79787F Electronic versions are uncontrolled except when accessed directly from the Document Report Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	UDFN10 3.5X2, 0.575P		PAGE 1 OF 1

onsemi and ONSE Mi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.